

BOOSTER N₂

BON2 160-350

Delivery

l/min 300 - 8500 / m³h 18 - 51

Pressure

BAR 100 - 350 / PSI 1450 - 5000

SUCTION

BAR 2 - 7 / PSI 30 - 100



Quality system certified
to iso 9001

All technical data may be changed

MADE IN ITALY BY NARDI COMPRESSORI


www.nardicompressori.com

BOOSTER N2 160-350

INDUSTRY is a product line that includes several products made by NARDI COMPRESSORI which are designed to operate at very high efficiency and at the same time are made with strong materials that ensure many hours of operation. BOOSTER N2 is a compressor that draws from a pressurized line, in this case Nitrogen "N2" at a minimum pressure of 2 bar.

QUALITY OF COMPRESSOR BLOCK

The compressor block or pump unit is the heart of the machine, it is a critical component in which NARDI has put particular attention. It has features that make it unique in the world. Among these, the use of light alloys with high thermal efficiency, such as aluminum alloys that are also used for the construction of the cylinders. The pump unit does not undergo any paint coating to enhance the heat dissipation of its low corrosion assembling elements.

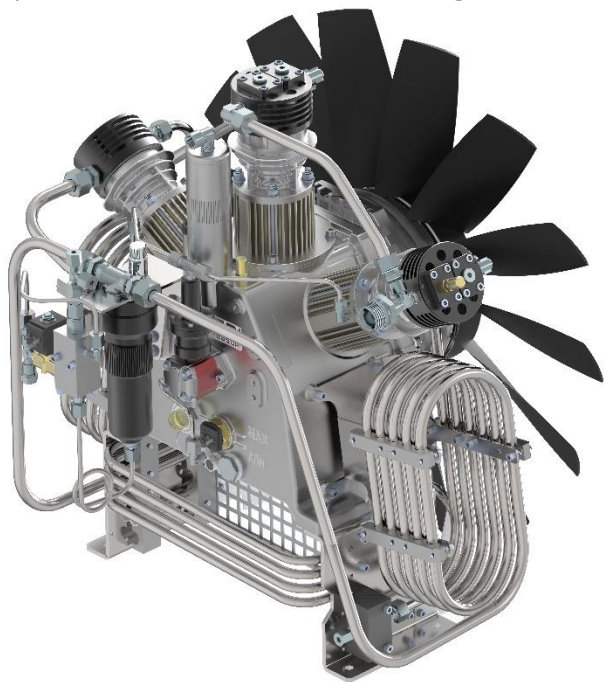

The bearings of the crankshaft have rollers, extremely robust and made in Europe which guarantee a long life of the compressor. An oil pump provides a constant lubrication of the inner workings of the block with oil cleaned of impurities by a filter and by a magnet which catches any metals present in the lubricating oil.

The compressed air cooling is obtained by inter-stage stainless steel cooling coils.

EFFICIENCY OF THE FRAME

The sound insulated frame or cabinet is constructed with panels that are designed to work in harsh conditions and to withstand harsh environments. In fact if water were to enter from the top ventilation grill it would be conveyed and ejected by a canal and two side holes preventing the pumping unit from getting wet. In addition to this the sound absorbing internal lining of the panels make the cabinet very quiet. The large wing-shaped fan blades guarantee not only a very low sound pressure but also a highly efficient ventilation.

CONTROL AND ELECTRONICS

For proper operation of the compressor, NARDI has designed a new electronic control panel. This new system, controls all the key points as temperature, oil level, current consumption, inlet pressure, outlet pressure and manages all the valves and solenoid valves. In addition to this, the electronic control panel handles the service schedule and monitors the status of the filtering system.

PURITY OF FILTRATION

The compressor is equipped with various filters and separators, in addition to two separators assembled on the compressor block, one of which is specific for Nitrogen, it also has two large filters that guarantee many work hours without letting pass through water and oil residue.

ECONOMY

Everything in the compressor is designed to optimize both the operating costs as well labor costs. Service of the compressor in addition of being rather inexpensive is scheduled at long time intervals. When the compressor is in operation to optimize the cost NARDI has designed the automatic condensate drain of the compressor, which is equipped with a unique patented **SLOW FLOW SYSTEM**, that reduces the quantity of gas expelled by 80% saving on pressurization of the entire system.

All technical data may be changed

MADE IN ITALY BY NARDI COMPRESSORI

www.nardicompressori.com



- 1 Compressor Block
- 2 IE3 Electric Motor
- 3 Intake Valve
- 4 Filter Separator
- 5 First Filter PAC3
- 6 Second Filter PAC3
- 7 Condensate Drain Valve
- 8 Compressor Pressure Gauge


- 9 Electronic Control
- 10 Sound Absorbing Panels
- 11 Frame Extension (optional)
- 12 Storage 100 liters (optional)
- 13 Storage Pressure Gauge
- 14 PED Certified Safety Valve
- 15 Compressed Gas Outlet

All technical data may be changed

MADE IN ITALY BY NARDI COMPRESSORI

www.nardicompressori.com

- 1 OPEN FRAME COMPRESSOR
- 2 SILENCED COMPRESSOR
- 3 STORAGE 2 CYLINDERS (optional)
- 4 STORAGE 12 CYLINDERS (optional)
- 5 STORAGE 16 CYLINDERS (optional)

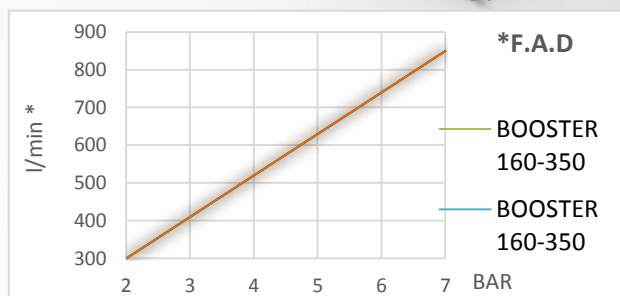

Compressor Model	F.A.D.		Intake Pressure	P.Max	Stage	Revolution	Power	Noise	Weight		Dimensions
Modello Compressore	Aria resa		Pres. Aspir.	P.Max	Stadi	Giri	Motore	Rumore	Peso		Dimensioni
Type	l/min.	m ³ /h	Bar	Bar	N°	Rpm	HP - kW	dB	Kg	Lbs	cm (LxWxH)
BOOSTER N2 160-350 OPEN	300 - 400	18 - 24	2 - 3	350	2	1250	IE3 15 - 6,5	79	430	947	86 x 130 x 174
	510 - 620	30 - 37	4 - 5				IE3 15 - 7,5				
	740 - 850	45 - 51	6 - 7				IE3 15 - 8,5				
BOOSTER N2 160-350 SILENCED	300 - 400	18 - 24	2 - 3	350	2	1250	IE3 15 - 6,5	68	460	1014	86 x 150 x 174
	510 - 620	30 - 37	4 - 5				IE3 15 - 7,5				
	740 - 850	45 - 51	6 - 7				IE3 15 - 8,5				

Storage Model	Cylinders	Volume	Max Pressure		Directive	Weight		Dimensions
Modello Stoccaggio	Bombole	Volume	Pressione massima		Norma	Peso		Dimensioni
Type	N°	Litri	BAR	PSI	Type	Kg	Lbs	cm (LxWxH)
BON2-160-STOCK 2 TANK	2	100	300	4350	PED	205	452	72 x 68 x 185
STOCK 12 TANK	12	600	300	4350	TPED	1100	2425	101 x 76 x 201
STOCK 16 TANK	16	800	300	4350	TPED	1320	2910	101 x 101 x 201

NARDI COMPRESSORI SRL

Via Marco Polo, 2
36075 Montecchio Maggiore (VI) ITALY

Phone +39 0444 159111
Fax +39 0444 159122

SUBJECT TO TECHNICAL MODIFICATIONS

info@nardicompressori.com

www.nardicompressori.com