

Reliability & Efficiency without Compromise

Rotary Screw Compressors



Premium compressor design and industry leading warranty

L-Series 7 - 11 kW Fixed & Regulated Speed

CompAir 🍓

🐣 CompAir

CompAir





Good - Better - Best Efficiency



The L-Series from CompAir

Well known in the industry for quality and reliability, CompAir continuously develops and expands the L-Series to achieve optimum performance and efficiency and maximum flexibility. The wide range of screw compressors from 7 to 11 kW includes fixed and regulated speed models, high efficiency models and is available as airstation including receiver and refrigerant dryer.

L-Range Fixed & Regulated Speed

Pressure Range 5 to 13 bar

0.41 to 1.87 m³/min

7.5 to 11 kW

Engineering Excellence

Compressors are more than just a financial investment, they are a key component in ensuring that manufacturers, processors and operators receive consistent, high quality low cost air. The screw compression element is the heart of the compressor and therefore CompAir keeps the design and manufacture in-house, using the latest CNC rotor grinding machinery, coupled with online laser technology. The resulting reliability and performance ensure that operating costs will remain low throughout the compressor's life.

Our top quality airends are covered by the new 5 Years warranty and upto 44,000 hours*

The dryers too are designed and manufactured in-house – the customer designed heat exchangers and patented control board delivering the very best combination of high efficiency, low pressure drop and small footprint.





ßß

Known for reliability, continuously developed in efficiency, extended with flexibility, unmatched in terms of warranty.

55



Best efficiency – Made in Germany



e-Range Highly Efficient Compressors, Fixed and Regulated Speed

The L-Series are designed in the Center of Excellence in Germany. The most important component of a compressor, the airend, is also produced on this site. The engineering team develop airends which perfectly match the compressor requirements and achieve highest performance and efficiency levels. The engineering and manufacturing teams are proud to build this range, which is known in the market not only for the efficiency but also for the flexibility it offers. The compressors are available mounted on a receiver and with a dryer, providing a compact solution and minimum space requirements.



A Design Concept Based on Reliability and Flexibility

Fully Integrated Airend

The advanced design of the high efficiency airend allows operation at low rotational speeds, and consequently lowers the energy costs. The innovative integrated design, including oil separation, oil filter and thermostatic valve, reduces the number of external hoses and components offering excellent reliability.

GERN

ENGINEERING

IGN&MANUFACTURE

Combined Air / Oil Cooler

Equipped with a bypass for rapid warm-up and control of the oil temperature, reducing wear, eliminating condensate in the compressor system and providing low air discharge temperature.

High Efficiency Electric Motor The compressors are equipped with an energy saving IE3 electric motor.

Automatic Belt Tensioning System

The maintenance-free system provides automatic and accurate belt tension and extends the belt life.

Factory-Filled Synthetic Lubricant Reduces service costs by extending the oil change period to up to 8,000 hours.

Allows the compressor to be placed at the point of use.

• Up to 45°C Ambient Temperature Reliable operation, even in challenging environments.

Delcos Pro Compressor Controller

The control system ensures reliable operation and protects the investment by continuously monitoring operational parameters. The Delcos Pro also has the capability to have programmable inputs and outputs, control additional equipment as well as providing the following features in clear readable text:

- Discharge / line pressure display
- Air / oil temperature display
- Total hours run and under load
- Service due indicator
- Enhanced fault log monitor
- Real time clock
- Timer controlled stop/start
- Remote start/stop
- Auto restart after power failure
- Second pressure setting
- Status indication
- RS485 Modbus RTU


Ergonomic Controller Positioning

Controller can be positioned on top or front of the compressor.





It is exactly the quality you would expect from a company with a heritage of more than 200 years






AirPlus

The best investment protection you can get

The Perfect Response to Individual Air Demand

Regulated speed compressors from CompAir can efficiently and reliably handle the varying air demand found in most plant air systems.

The annual cost of ownership can be significantly reduced using regulated speed technology.



CompAir RS Features are Your Benefits

The L-RS Series products are designed to obtain the greatest efficiency across the entire operating range.

Wide Regulation Range No cycles means substantial energy savings

Perfect Motor - Drive - Airend Design High efficiency across broad flow range



Compressed Air Purification

A modern production system and process demands increasing levels of air quality. A CompAir compressed air system utilising the latest technology provides an energy efficient solution at lowest life cycle costs.

- Water Cyclone Separator X Series
- Compressed Air Filter CF Series
- Condensate Drain System
- Compressed Air Refrigerant Dryer
- Heatless Desiccant Dryers
- Heat Regenerative Desiccant Dryers
- Nitrogen Generator
- SmartAir Master Multi Compressor Controllers



5 Years Warranty Upgrade!

The CompAir Extend 5 Warranty and Service programmes will assure you up to 40,000 hours / 5 years ¹⁾. It is one of the most generous warranties available in the industry affording you total piece of mind.

Your Benefits :

- The CompAir authorised service provider will deliver a guaranteed quality of service
- An Extend 5 service agreement underpinning the warranty will enable accurate maintenance, budgeting and cost of ownership
- The use of genuine CompAir parts and lubricants will maximise compressor life and efficiency
- ¹⁾ Warranty duration is up to 5 years / 40,000 hours on the whole package. Whichever is the soonest.





Compact Design - Easy Installation

The small footprint reduces the space required for installation.

Easy Servicing

The design of these packages ensures that the service points are readily accessible. The enclosure side doors are hinged and removable to allow complete access to all service points. The reduced number of moving parts further lowers the maintenance costs.

CompAir Genuine Spare Parts

Enjoy complete peace of mind.

Genuine CompAir parts and lubricants ensure that compressed air plant reliability and efficiency is maintained at the highest standards. CompAir spare parts and lubricants are distinguished by:

- Long service life, even under harshest conditions
- Minimum losses contributing to energy savings
- High reliability improves plant up-time
- Products manufactured with the strictest Quality Assurance Systems



The right product to do the job

L-Series - Technical Data

L07 - L11 Fixed Speed

Compressor Model	Nominal Pressure	Drive Motor	FAD ^{1]}	Noise Level ^{2]}	Weight	Dimensions L x W x H
	[bar g]	[kW]	[m³/min]	[dB(A)]	[kg]	[mm]
	7.5	7.5	1.30	70	215	667 x 630 x 1050
L07	10		1.06			
	13		0.85			
	7.5		1.87			
L11	10	11	1.61	70	225	667 x 630 x 1050
	13		1.32			

L07 RS - L11 RS Regulated Speed

Compressor Model	Nominal Pressure	Drive Motor FAD ^{1]} [m ³ /min]		Noise Level at 70% load ^{2]}	Weight	Dimensions L x W x H	
	[bar g]	[kW]	min.	max.	[dB(A)]	[kg]	[mm]
L07 RS	7.5	7.5	0.48	1.26	63	222	667 x 630 x 1050
	10		0.44	1.01			
	13		0.41	0.83			
L11 RS	7.5	11	0.63	1.81	64	231	667 x 630 x 1050
	10		0.64	1.56			
	13		0.57	1.26			

L07 - L11 / L07 RS - L11 RS Airstation

Compressor Model	Nominal Pressure	Refrigeration Dryer ^{3]}	Air Receiver	Air Outlet	Weight	Dimensions L x W x H
Widdel	[bar g]		[Volume]		[kg]	[mm]
L07 / L07 RS	7.5	1	270 litres	RP 3/4"	336 / 353	1541 x 695 x 1577
	10					
L11 / L11 RS	7.5	<i>✓</i>	270 litres	RP 3/4"	350 / 362	1541 x 695 x 1577
	10					

1] Data measured and stated in accordance with ISO 1217 Ed. 4, Annex C & Annex E and the following conditions:

Air Intake Pressure 1 bar a, Air Intake Temperature 20° C, Humidity 0 % (dry) Measured in free field conditions in accordance with ISO 2151 and ISO 9614-2, tolerance \pm 3 dB(A).

3] The refrigerant dryer requires a separate electric supply. For further specifications please refer to refrigerant dryer documentation

Standard range L07 to L11, RS Fixed & regulated speed

Based on the individual customer requirements, the compressors can be combined with different options to provide maximum flexibility. The combined versions including receiver or/and dryer are space saving solution - ideal where floor space is precious.


- Compressor base mounted
- Complete package including compressor, dryer and receiver

The stand alone compressors feature a very compact design with a class-leading footprint of just 0,4 m². In the combination with dryer and receiver the floor space can be optimised, in addition the installation is very easy.


In-house made airend

The high quality airends use state-of-the-art manufacturing techniques. They are designed with focus on reliability and efficiency. The rotors are accurate and thoroughly checked and measured by a computerised control system. The airends achieve a flat specific power consumption curve, which enables efficient use in wide rpm range.





Installed Components

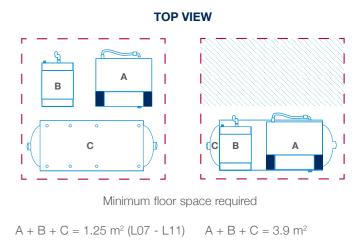



Global Experience -Truly Local Service

With over 200 years of engineering excellence, the CompAir brand offers an extensive range of highly reliable, energy efficient compressors, dryers and accessories to suit all applications.

An extensive network of dedicated CompAir sales companies and distributors across all continents provide global expertise with a truly local service, ensuring our advanced technology is backed up with the right support.

CompAir has consistently been at the forefront of compressed air systems development, culminating in some of the most energy efficient and low environmental impact compressors on the market today, helping customers achieve or surpass their sustainability targets.

CompAir Compressed Air Product Range

Advanced Compressor Technology Lubricated

- Rotary Screw*
- Piston
- Portable

Oil-Free

- Two Stage Rotary Screw*
- Water Injected Screw*
- Two Stage Screw*
- Piston
- High Speed Centrifugal Quantima®
- Rotary Scroll

Complete Air Treatment Range

- Filter
- Refrigerant and Desiccant Dryer
- Condensate Management
- Heat of Compression Dryer
- Nitrogen Generator

Modern Control Systems

- CompAir Controllers
- SmartAir Master Sequencer
- iConn Smart Flow Management

Value Added Services

- Professional Air Audit
- Performance Reporting
- Leak Detection

& CompAi

PureAir

Leading Customer Support

- Custom Engineered Solutions
- Local Service Centers
- Genuine CompAir Parts
 and Lubricants

* These range of units are available in Fixed and Regulated Speed versions. CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.

21-30, GIDC Estate, Naroda, Ahmedabad - 382 330, India. info@compair.com | www.compair.com